

DELTA

PREVENTION

VSS SafetyLine




PERMANENT WARNING LINE



PERMANENT WARNING LINE VSS SafetyLine

- Permanent visual delimitation of a safety perimeter
- Modular: can be combined to Delta Prevention guardrails to secure the whole rooftop at low cost
- Evolutive: can be converted into a guardrail
- Freestanding: 100% without perforation
- Compliant to OSHA permanent safety line standards
- Quick installation


Not a substitute for a fall protection system

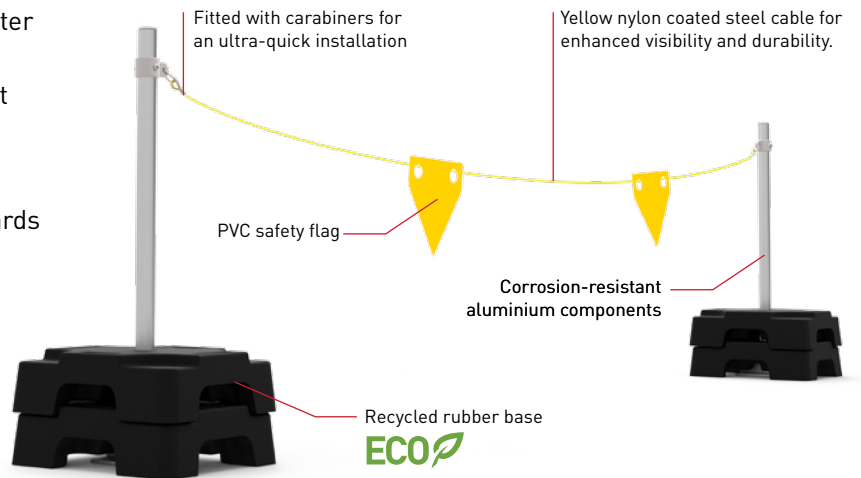

Measures represent maximal spacing between 2 vertical posts.
12.5' and 20' cables come preassembled with carabiners.

Typical VSS SafetyLine installation combined to Delta Prevention guardrail sections.

As a result, the whole perimeter is delimited and protected.

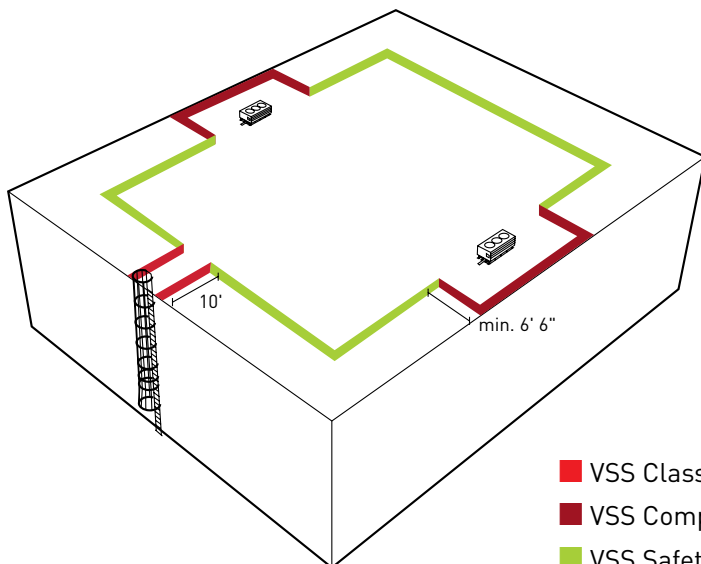

- VSS Classic guardrail
- VSS Compact guardrail
- VSS SafetyLine

Specifications:

Max distance between upright:	240"
Max length of starter/ending:	150"
Cable highest point allowed:	39" from the ground
Cable lowest point allowed:	34" from the ground
Cable - material:	yellow nylon coated looped steel cable
Cable - diameter:	1/4"
Flag - material:	yellow nylon
Max distance between flag:	72"
Counterweight:	50 lb/base
Counterweight material:	recycled rubber
Railing & upright material:	6061-T6 aluminum
Railing & upright OD:	1,9"
Junction & clamp material:	galvanized steel
Hardware material:	stainless steel
Set screw torque:	30 lb/ft (except CL201: 20 lb/ft)
Usage:	permanent, temporary
Design patent:	#162620
Complies with:	OSHA: 1926.502(f) CSTC: 2.9.4.1
Warranty:	10 year

Final product may differ from the one shown here.

CONTACT US TO PROTECT YOUR ASSETS



7000 Industrial blvd
Chambly (Quebec) J3L 4X3 CANADA

1 844 855-4273
info@deltaprevention.com

DLT16005